


data SHEET

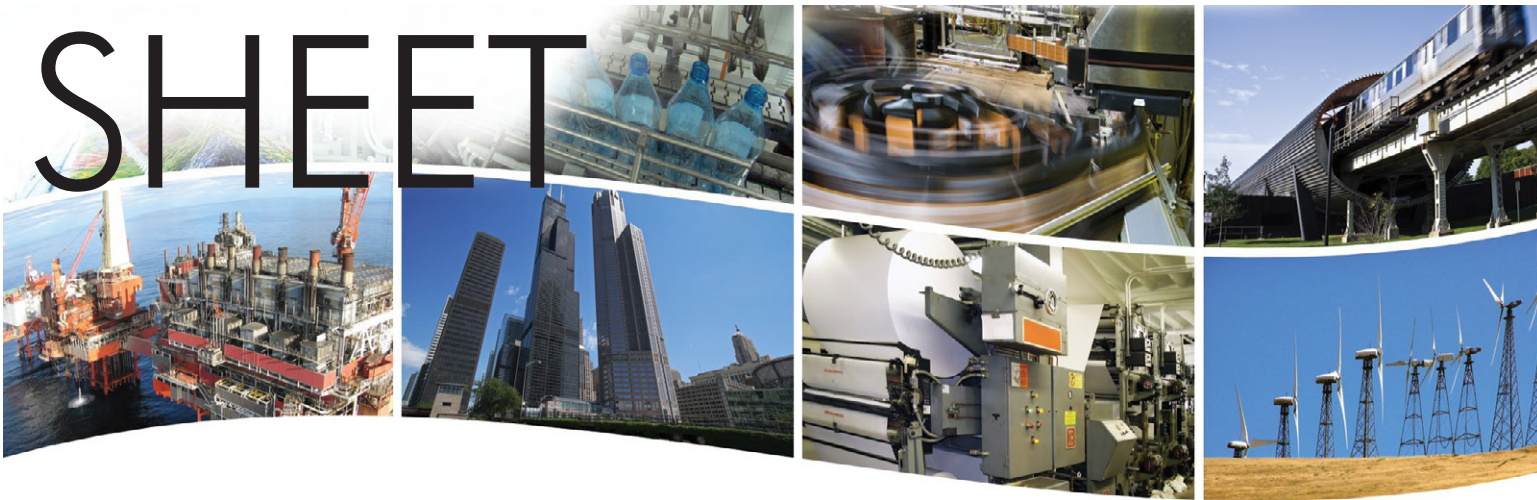

EISK8 Skorpion Fibre Switches ***Cost Effective, 100 Mbps-speed — Compact Size***


EISK8 Skorpion fibre switches are eight-port unmanaged Ethernet switches that provides 100 Mbps performance on all ports to accommodate a range of control devices and workstations commonly found in an automation project. For 10 Mbps legacy devices, the switches automatically reduce port-speed. These low-cost compact units have a rugged metal enclosure and are intended for installation in control panels using DIN-rail mounting.

These are a plug-and-play Ethernet switches that require no configuration. All copper ports

automatically configure their data rate and duplex using the Auto-negotiation protocol. Depending on the capability of the link partner, communication is set at 10 or 100 Mbps and at either half- or full-duplex. Each port accommodates either a straight-through or crossover cable using the Auto-MDIX protocol.

Each unit is powered from a low-voltage source (either AC or DC). Redundant power connections are provided for back-up power schemes. LEDs assist in troubleshooting.

- Plug-and-Play operation
- 10BASE-T/100BASE-TX/100BASE-FX
- Shielded RJ-45 connectors
- Choice of fibre connectors
- Auto-negotiation of speed and duplex
- Auto-MDIX supports cable inversion

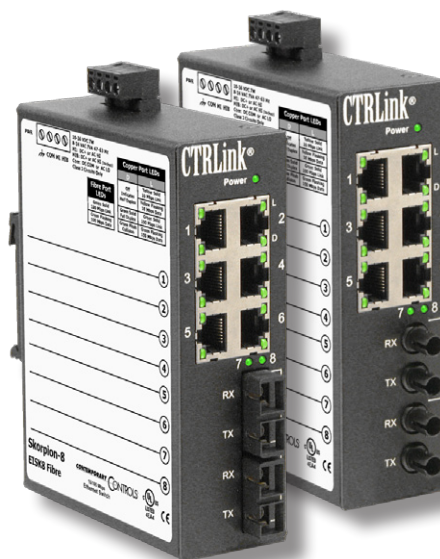

- DIN-rail mounting
- Rugged metal enclosure
- Diagnostic LEDs
- Enhanced EMC compliance
- UL 508 listed, c-UL listed, CE mark
- 24 VAC/VDC powered

CTRLink®

Overview


The Skorpion Switch is intended for control panel installations where DIN-rail space is at a premium by requiring a width of only 41 mm of rail space. A metal DIN-rail clip attached to the aluminium enclosure can survive the toughest installation. A writable side label allows the installer an opportunity to document field cabling locations right on the unit.

Each unit is powered from either a 10–36 VDC or 24 VAC ($\pm 10\%$) source. A half-wave rectified low-voltage power supply allows the sharing of power with other 24 VAC/VDC control devices from a common power supply. With redundant power

connections, a backup power scheme can be supported. A removable power connector facilitates the servicing of the unit.

LEDs built into each RJ-45 connector indicate data rate and activity on each copper port — greatly assisting in troubleshooting.

Each unit is UL 508 Listed and c-UL Listed for Industrial Control Equipment, complies with CFR 47 Part 15 Class A, carries the CE Mark and each is RoHS compliant.

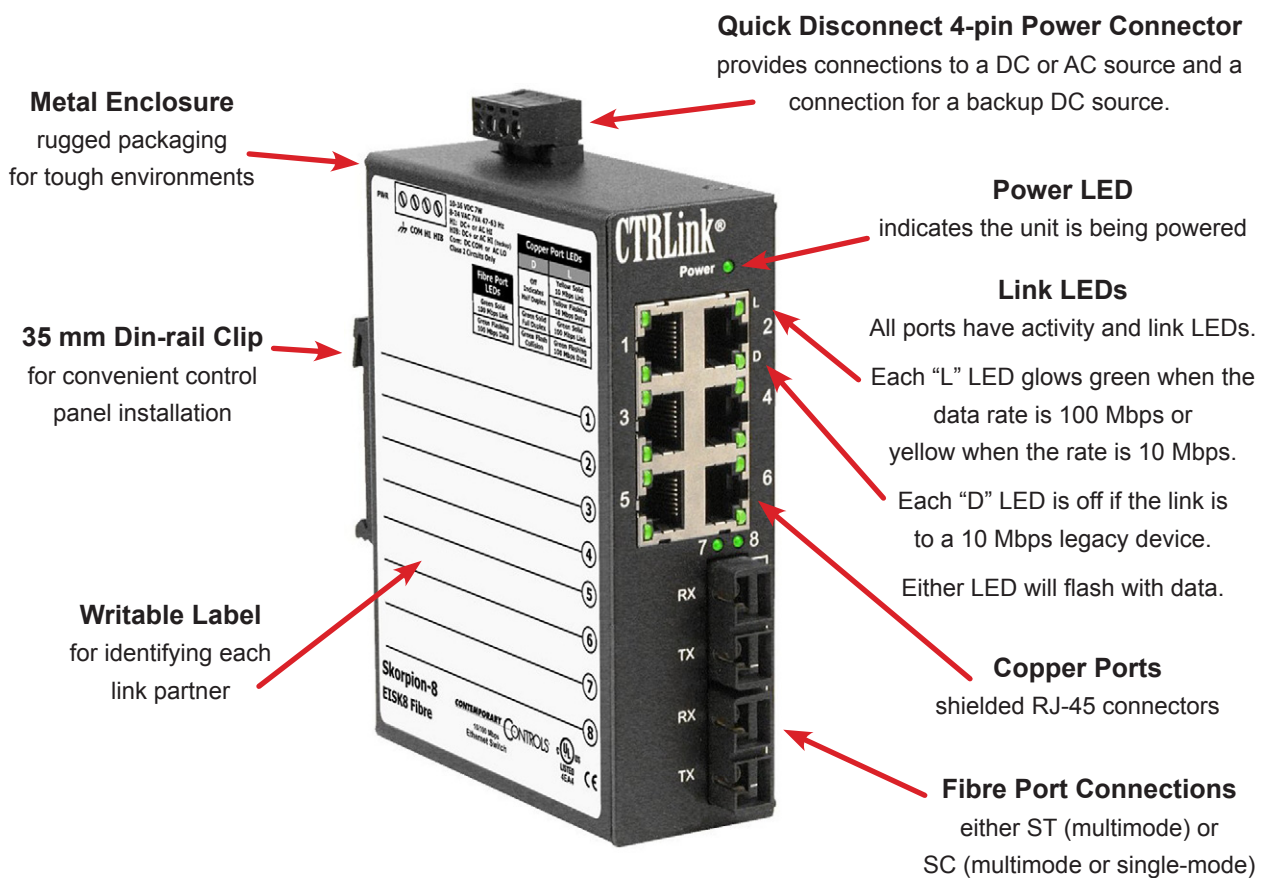

Specifications

Power Requirements	10–36 VDC 6 W or 24 VAC $\pm 10\%$ 12 VA 47–63 Hz
Operating Temperature	0°C to 60°C
Storage Temperature	–40°C to 85°C
Relative Humidity	10–95%, non-condensing
Protection	IP30
Mounting	TS-35 DIN-rail
Shipping Weight	1 lb (0.45 kg)
Ethernet Communications	IEEE 802.3 10/100 Mbps data rate using RJ-45 connectors, 100 m (max)
LEDs	<div> <div>Power</div> <div>Green = power OK</div> </div> <div> <div>“L” LEDs</div> <div> Green = 100 Mbps communication established Yellow = 10 Mbps communication established Flashing = data transmissions occurring </div> </div> <div> <div>“D” LEDs</div> <div> Green = Full-duplex communication established Off = Half-duplex communication established </div> </div>


Regulatory Compliance

CE Mark; CFR 47, Part 15 Class A; RoHS;
UL 508 Industrial Control Equipment




RJ-45 Connector Pin Assignments

Pin	Function
1	TD+
2	TD–
3	RD+
4	Not Used
5	Not Used
6	RD–
7	Not Used
8	Not Used



Mechanical Drawing

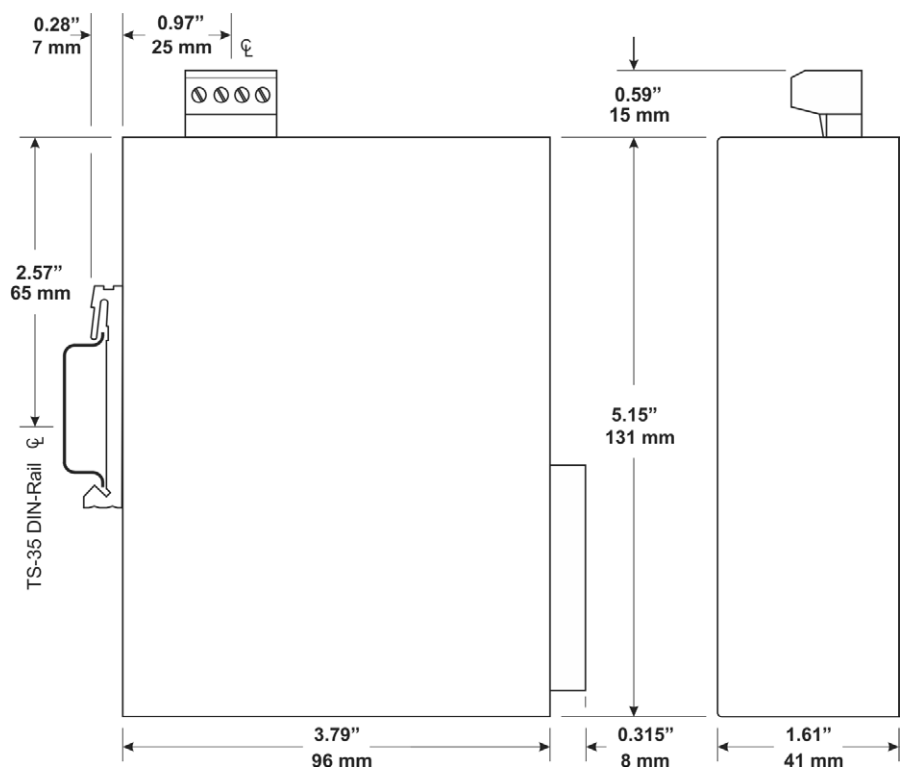


Power Considerations

Applied voltage must be in the specified range and deliver a current commensurate with power consumption. The recommended size for solid power conductors is 16–20 AWG; and for stranded conductors use 16–18 AWG. Zero volts (COM) is isolated from chassis (earth). Input connections are reverse-polarity protected.


Input power: 10–36 VDC or 24 VAC ± 10%, 47–60 Hz.

Connecting chassis to earth or using a backup source is always optional.

All options shown are for use in Class 2 circuits if applied voltage is limited to 30V DC.

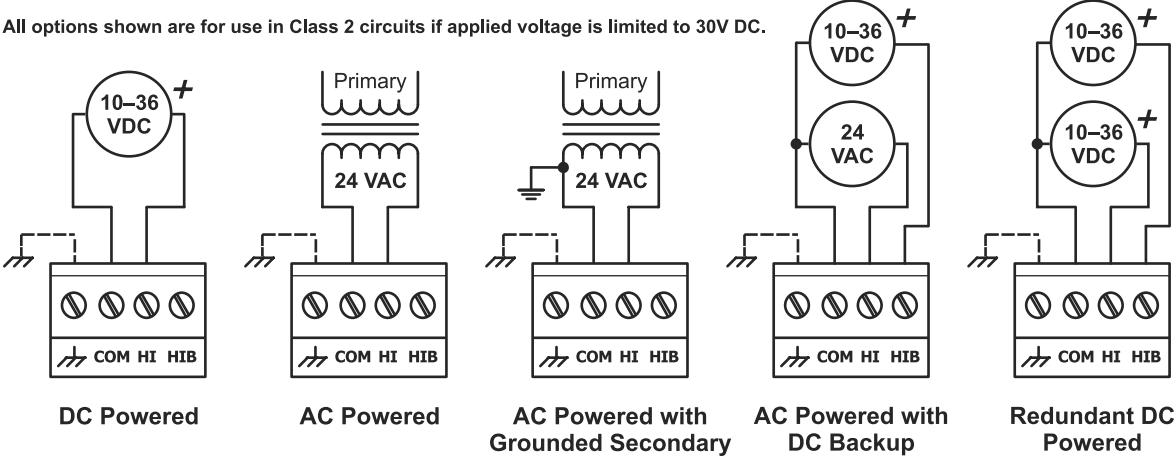

Typical Switch Installations

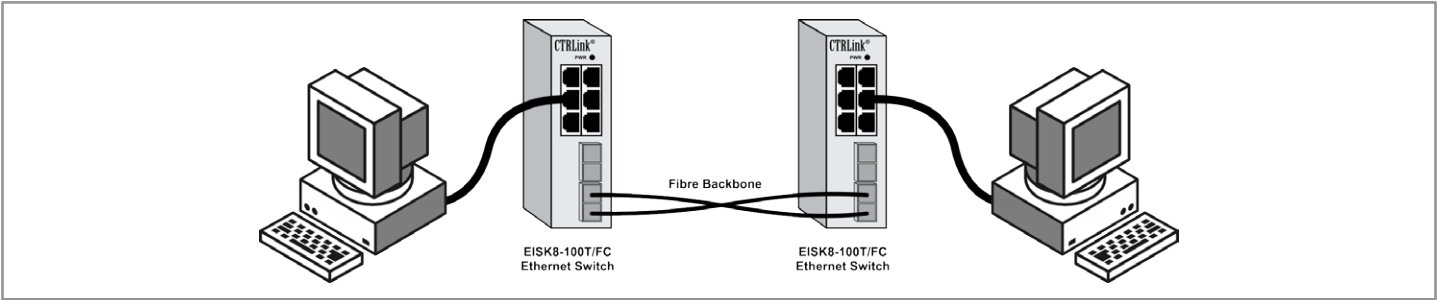

Ordering Information

Model	Description
EISK8-100T/FC	6 ports 10/100 Mbps, 2 ports 100 Mbps MM fibre SC connectors
EISK8-100T/FCS	6 ports 10/100 Mbps, 2 ports 100 Mbps SM fibre SC connectors
EISK8-100T/FT	6 ports 10/100 Mbps, 2 ports 100 Mbps MM fibre ST connectors

United States Contemporary Control Systems, Inc. 2431 Curtiss Street Downers Grove, IL 60515 USA Tel: +1 630 963 7070 Fax: +1 630 963 0109 info@ccontrols.com www.ccontrols.com	China Contemporary Controls (Suzhou) Co. Ltd 11 Huoju Road Science & Technology Industrial Park New District, Suzhou PR China 215009 Tel: +86 512 68095866 Fax: +86 512 68093760 info@ccontrols.com.cn www.ccontrols.asia	United Kingdom Contemporary Controls Ltd 14 Bow Court Fletchworth Gate Coventry CV5 6SP United Kingdom Tel: +44 (0)24 7641 3786 Fax: +44 (0)24 7641 3923 info@ccontrols.co.uk www.ccontrols.eu	Germany Contemporary Controls GmbH Fuggerstraße 1 B 04158 Leipzig Germany Tel: +49 341 520359 0 Fax: +49 341 520359 16 info@ccontrols.de www.ccontrols.eu
---	--	--	---